



## Ausladung und Tragfähigkeit

Radius and capacity / Portée et charge / Sbraccio e portata / Alcances y cargas / Vlucht en draagkracht

m	m / kg	m / kg																		
		6,0	8,0	10,0	12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,5	32,0	34,0	36,0	38,0	40,0	42,0
42,0	3,5-10,35 8000	8000	8000	8000	6870	5850	5080	4480	4000	3600	3270	2990	2750	2500	2360	2190	2050	1920	1810	1700
30,5	3,5-11,66 8000	8000	8000	8000	7770	6620	5760	5080	4540	4100	3730	3410	3140	2850						




## Auslegersteilstellung




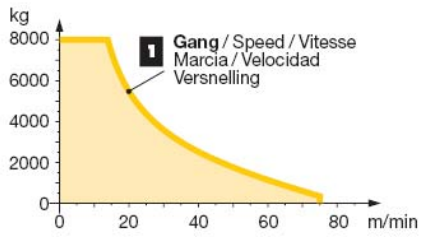
Steep angle positions / Flèche en position relevée  
Braccio inclinato / Pluma inclinada / Hoofdgiekstand

m	m / kg	Auslegersteilstellung 30° / Elevated jib 30° / Flèche inclinée 30° Braccio inclinato a 30° / Pluma inclinada 30° / Hoofdgiekstand 30°															
		6,0	8,0	10,0	12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,6	28,0	30,0	32,0	34,0	36,6
42,0	3,5-8,0 6000	6000	6000	5200	4580	4080	3680	3340	3050	2800	2590	2340	2240	2090	1960	1840	1700
30,5	3,5-12,0 6000	6000	6000	6000	6000	5260	4660	4180	3790	3450	3170	2850					

## Antriebe


Driving units / Mécanismes d'entraînement / Azionamenti / Mecanismos / Aandrijvingen

	0 ↔ 0,8 U/min	5,0 kW FU
	0 ↔ 71,0 m/min	4,0 kW FU
	0-30°	50 sec.

	↔ stufenlos / stepless / régl. continu regl. progressiva / sin escalones / traploos kg m/min
24,0 kW Litronic-FU WW 230 KY 003	5 Lagen Layers Couches Strati Camadas Lagen
	74,0 m LS-Trommel
	8000 0 ↔ 14 2800 0 ↔ 37 1760 0 ↔ 56 350 0 ↔ 75
	kg 8000 6000 4000 2000 0
	0 20 40 60 80 m/min
	Gang / Speed / Vitesse Marchia / Velocidad Versnelling

		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	R1	R2	
	(km/h)	5,2	6,2	7,5	9,0	11,0	13,1	15,6	18,7	23,6	28,2	34,3	41,0	50,0	59,5	71,4	80,0	5,5	6,6	46%
	(km/h)	2,9	3,5	4,3	5,1	6,2	7,4	8,9	10,6	13,4	16,0	19,4	23,2	28,3	33,7	40,4	48,1	2,6	3,1	63%

	445/65 R 22,5	BGL		C.0.08.0080
---	---------------	-----	---	-------------

	400 V	Hz	kVA
	111,0 m 5 x 16 mm <sup>2</sup>	50	37,0